

monolith

VOGUSH SURFACES

1200x
1800mm

CALYPSO BEIGE

Size
1200x1800mm

Thickness
9mm

monolith
VOGUSH SURFACES



CALYPSO BEIGE



RANDOM 4 FACES

Finishes: GRANOLITH

CALYPSO GRIGIO


Size
1200x1800mm

Thickness
9mm

monolith
VOGUISH SURFACES



CALYPSO GRIGIO

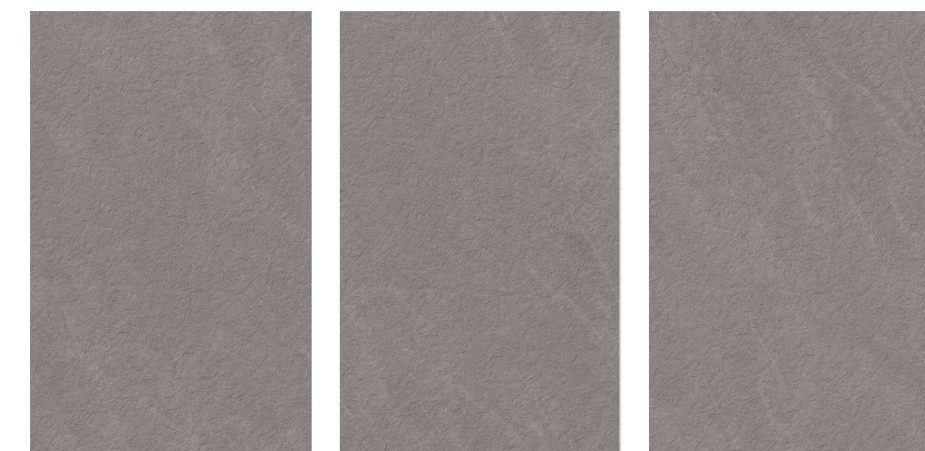

RANDOM 4 FACES

Finishes: GRANOLITH

CALYPSO ICE

Size
1200x1800mm

Thickness
9mm

monolith
VOGUSH SURFACES



CALYPSO ICE



RANDOM 4 FACES

Finishes: GRANOLITH

CALYPSO NERO

Size
1200x1800mm

Thickness
9mm

monolith
VOGUSH SURFACES



CALYPSO NERO



RANDOM 4 FACES

Finishes: GRANOLITH

SPECTO CREMA


Size
1200x1800mm

Thickness
9mm

monolith
VOGUSH SURFACES



SPECTO CREMA

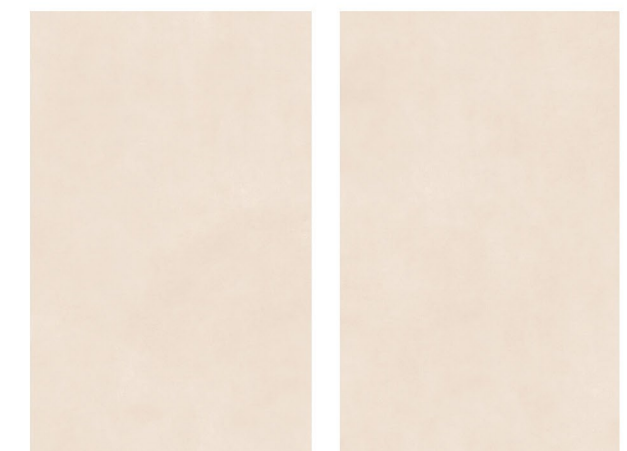

RANDOM 3 FACES

Finishes: GRANOLITH

SPECTO GREY


Size
1200x1800mm

Thickness
9mm

monolith
VOGUISH SURFACES



SPECTO GREY

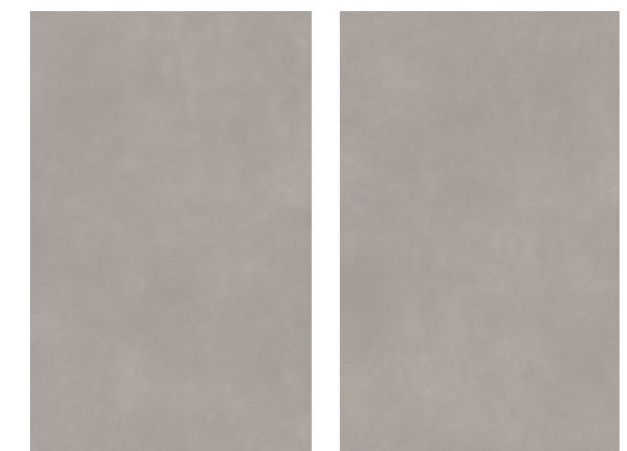

RANDOM 3 FACES

Finishes: GRANOLITH

SPECTO GRIGIO


Size
1200x1800mm

Thickness
9mm

monolith
VOGUSH SURFACES



SPECTO GRIGIO

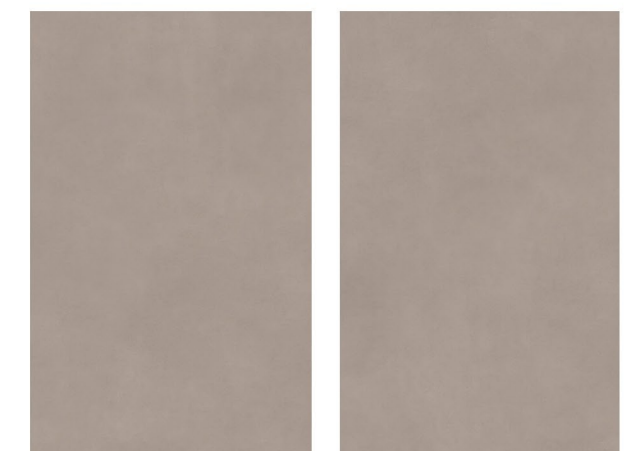

RANDOM 3 FACES

Finishes: GRANOLITH

SPECTO WHITE


Size
1200x1800mm

Thickness
9mm

monolith
VOGUISH SURFACES



SPECTO WHITE

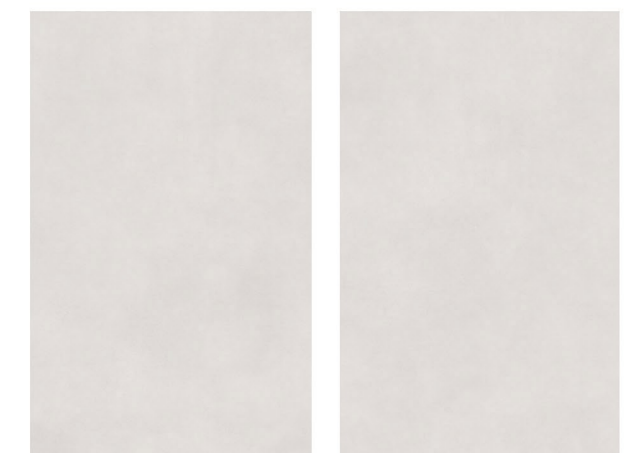

RANDOM 3 FACES

Finishes: GRANOLITH

TECHNICAL SPECIFICATION OF MONOLITH FULLBODY VITRIFIED TILE

TEST DISCRIPTION			
CHARACTERISTIC	TEST METHOD	STANDARD AS PER ISO-13006/EN14411 GROUP	ACCORD VALUE
Deviation in Length	IS-13630-1	±0.50%	±0.10%
Deviation in Width	IS-13630-1	±0.50%	±0.10%
Deviation in Thickness	IS-13630-1	±5.00%	±5.00%
Straightness of Sides	IS-13630-1	±0.50%	±0.10%
Rectangularity	IS-13630-1	±0.60%	±0.15%
Surface Flatness	IS-13630-1	±0.50%	±0.20%
Surface Quality	IS-13630-1	Min. 95%	Min. 95%
PHYSICAL PROPERTIES			
Water Absorption	IS-13630-2	≤0.50%	≤0.50%
Modulus of Rapture(N/mm2)	IS-13630-6	Min. 35N/mm ²	Min. 37N/mm ²
Breaking Strength(N)	IS-13630-6	< 7.5mm-700N ≥ 7.5mm-1300N	≤ 7.5mm-1000N ≥ 7.5mm-1400N
Moisture Expansion(mm/m)	IS-13630-3	0.06 Max	0.01 Max
Scratch Hardness of Surface	IS-13630-13	Min. 4	Min. 4
Resistance of Surface Abrasion(Glazed Tiles)	IS-13630-11	As pr Mfg.	Class II Min.
Co-Efficient of Linear Thermal Expansion	IS-13630-4	As pr Mfg.	6.5x10 ⁻⁶ Max.
Thermal Shock Resistance	IS-13630-5	10 Cycles Min.	10 Cycles Min.
Crazing Resistance	IS-13630-9	As pr Mfg.	5 Cycles at 7.5Bar Pressure
Impact Resistance-Coefficient of Restitution	IS-13630-14	As pr Mfg.	0.55 Min
Frost Resistance	IS-13630-10	As pr Mfg.	No Damage
Bulk Density (g/cc)	IS-13630-2	>2.0 gm/cc	>2.0 gm/cc
CHEMICAL PROPERTIES			
Resistance of Staining	IS-13630-8	Class I Min.	Class II
Resistance of Household Chemicals	IS-13630-8	Class AA Min.	Class AA
Resistance to Acids & Alkalis	IS-13630-8	As pr Mfg.	Min. Class A
Slip Resistance	150-13006/EN1444 Group B A	As pr Mfg.	As pr Mfg.

PACKING DETAIL

No.	Size	Thickness (approx.)	Pieces/Box	Area/Box	Wt./Box (approx.)
01	1200x1800mm	9 mm	2 pcs.	46.5 sq.ft	91 Kgs.

